

H 63 2?5 4 @C6 E649? @=@8 :6D :?4Ž
\$" AZ _Vvc5 cZjV
6cZ_l@_eRcZ
4R_RURL?!3 "E!
h h h ž VSR_T cŽ ^

H 632?4 @C žl R cVXZleVcVU ecRUV ^ Rd

EVjVaY _V+ =` TRj+&"*†) \$\$†"!() E`]7cVv+"†))†%#†"%& E` c`_è` 8 E2+*!&' #&###%#

72I + =` TRj+&"*†) \$\$†! (#& E`]7cVv+"†))†%#%#%#) E` c`_è` 8 E2+*!&' #&#%#!(


WEBANCOR BOWED ROLL FOOT MOUNTS

WEBANCOR Bowed Roll mounts are available in different sizes and configurations for different applications and can be utilized as required.

Some Bowed Rolls are simply bolted to the machine side frames, in which case the centre shaft is drilled and tapped to suit.

The standard economy duty mount is a common Foot or Flange mount casting with standard bolt mount pattern.

Shown here is the heavier duty mount with clamp locking, again usually to standard bolt patterns. This unit is required for spans longer than 80" or high tensions on most applications. It has a positive locking clamp that does not let the roll slip.

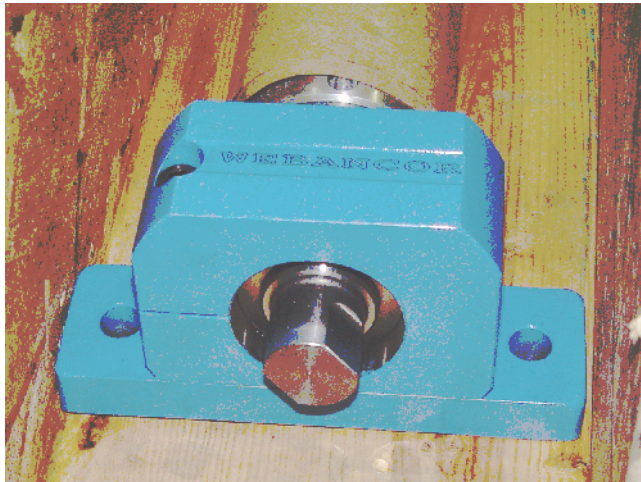

Heavy duty clamp locking is utilized in this mount. This mount is machined on our CNC machines from solid steel, not from a casting. Custom footprints can be supplied to retrofit any others manufacturers mounts.

Hand wheel adjusters are available for any size roll, but recommended on large diameter and long face length rolls to ease radial adjustment.